




Designed for use on aerial lift bucket trucks made by:

MBI Monzon Brothers, Inc


PLASTIC TECHNIQUES, INC.

MBI Crane & Hoist
Material Handling Products and Services

ASPLUNDH

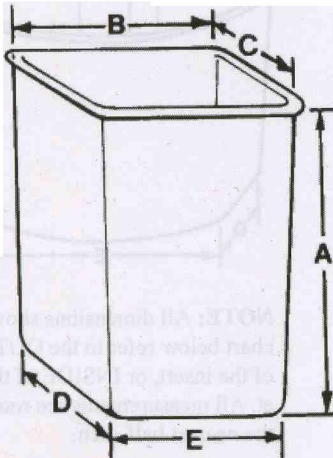

A is measured from the bottom of the rim to the base of the insert.
B & C measurements are taken one inch down from beneath the lip, on the outside of the insert.

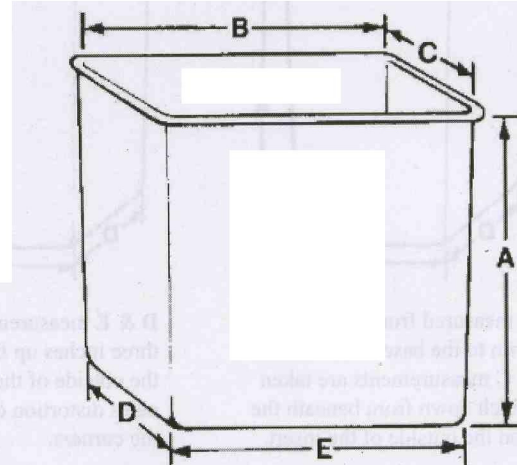

D & E measurements are taken three inches up from the bottom, on the outside of the insert. This eliminates distortion due to the radius of the corners.

NOTE: All dimensions shown in chart below refer to the OUTSIDE of the insert, or INSIDE of the bucket. All measurements are rounded to the nearest half-inch.

ELECTRICAL INSULATING BUCKET INSERT SPECIFICATIONS

PTI MODEL#	MFG'S CODE	SHAPE	DIMENSIONS IN INCHES					NO. PER BOX	PTI ACCESSORY ITEMS		
			A	B	C	D	E		LIDS	SCUFF PADS	SCUFF PADS W/ STEP
A-40	870260315 LB Style LR3.4.5	Square	40	24	24	21	21	4	2W28* 2L28*	D-20	DS-2
AT-20	Asplundh	Rect.	39	23.5	20	18	22	4	FITALL-I	D-24	DS-9
AS-28	Asplundh	Rect.	42	22	27	24	19	3	28L32	D-30	DS-30
AT-30	970097740 871002633	Rect.	39	29.5	23.5	27	21	5	30L34	D-26	DS-8
AT-30S	970097740	Rect.	39	29.5	23.5	21	27	5	30L34	D-26-N	DS-8
AT-31		Rect.	40	23.5	29.5	21	27	4	30L34	D-26	DS-8

* 2L28 Fits without controls, 2W28 fits with controls.

S = Insert with Molded Step

FORM #1001-C ASPLUNDH Rev. E 9/09
Copyright 2009