





Designed for use on aerial lift bucket trucks made by:

MBI Monzon Brothers, Inc

PLASTIC TECHNIQUES, INC.

MBI Crane & Hoist
Material Handling Products and Services

REACH-ALL

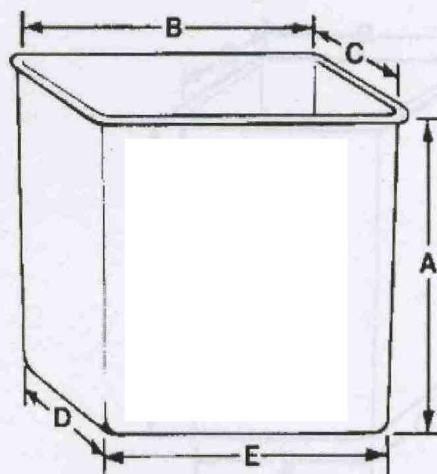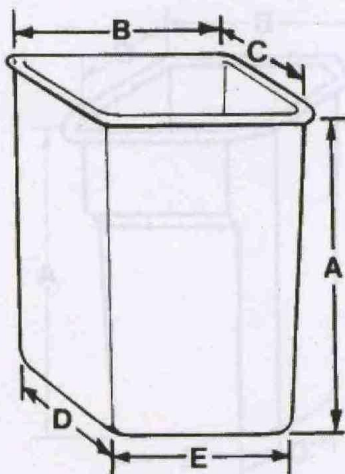

A is measured from the bottom of the rim to the base of the insert.
B & C measurements are taken one inch down from beneath the lip, on the outside of the insert.

D & E measurements are taken three inches up from the bottom, on the outside of the insert. This eliminates distortion due to the radius of the corners.

NOTE: All dimensions shown in chart below refer to the OUTSIDE of the insert, or INSIDE of the bucket. All measurements are rounded to the nearest half-inch.

ELECTRICAL INSULATING BUCKET INSERT SPECIFICATIONS

PTI MODEL#	MFG'S CODE	SHAPE	DIMENSIONS IN INCHES					NO. PER BOX	PTI ACCESSORY ITEMS		
			A	B	C	D	E		LIDS	SCUFF PADS	SCUFF PADS W/ STEP
RE-50	871100	Rect.	42	47	23	21	45	1	RA50	D-46	DS-12/DS-12A
RU-41	361716	Square	42	24	24	21	21	4	2L28	D-20	DS-1
RU-41S	Reach-All	Square	42	24	24	21	21	4	2L28	D-20-N	DS-1
RU-59	871000	Square	39	23.5	23.5	20	20	4	2L28	D-19	DS-15

S = Insert with Molded Step

The manufacturer's code numbers listed above are the part numbers of the aerial baskets in which PTI inserts fit.