




Designed for use on aerial lift bucket trucks made by:

MBI Monzon Brothers, Inc


PLASTIC TECHNIQUES, INC.

MBI Crane & Hoist
Material Handling Products and Services

TEL-E-LECT

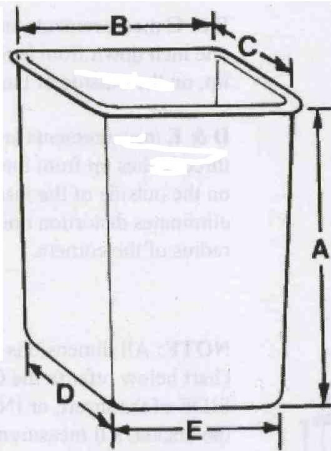

A is measured from the bottom of the rim to the base of the insert.
B & C measurements are taken one inch down from beneath the lip, on the outside of the insert.

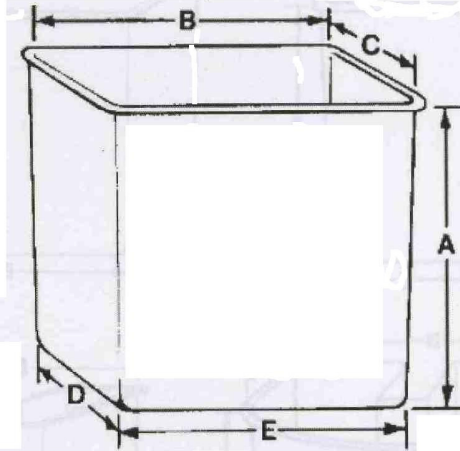

D & E measurements are taken three inches up from the bottom, on the outside of the insert. This eliminates distortion due to the radius of the corners.

NOTE: All dimensions shown in chart below refer to the OUTSIDE of the insert, or INSIDE of the bucket. All measurements are rounded to the nearest half-inch.

ELECTRICAL INSULATING BUCKET INSERT SPECIFICATIONS

PTI MODEL#	MFG'S CODE	SHAPE	DIMENSIONS IN INCHES					NO. PER BOX	PTI ACCESSORY ITEMS		
			A	B	C	D	E		LIDS	SCUFF PADS	SCUFF PADS W/ STEP
T-20	BFB	Rect.	39	23.5	20	17.5	22	4	FITALL-I	D-24	DS-9
T-28E	-----	Rect.	41	28	22	21	27	2	28L32/5F30	D-28	DS-8/DS-8A
T-28ES	Hi-Ranger	Rect.	41	28	22	21	27	2	28L32/5F30	D-28-N	DS-8
T-39	2677	Square	39	24	24	22	22	4	2L28	D-21	DS-6
T-39S	2677	Square	39	24	24	22	22	4	2L28	D-21-N	DS-4
T-42	2678	Square	42	23	23	22	22	3	2L28	D-21	DS-6
T-42S	2678	Square	42	23	23	22	22	3	2L28	D-21-N	DS-6
T-48	Tel-E-Lect	Rect.	42	47	22	21	46	1	411041	D-46	DS-11/DS-11A
T-30	Tel-E-Lect	Rect.	41	29	23	21	27	2	28L32/5F30	D-26	DS-32/DS-32A
T-30S	Tel-E-Lect	Rect.	41	29	23	21	27	2	28L32/5F30	D-26-N	DS-32A

S= Insert with Molded Step